




Forward Curved Centrifugal Blower Wheels - STRIP Type - DOUBLE Inlet


Constructed of a rigid, one-piece blade strip roll, locked to front ring and back plate.
 Materials: Galvanized steel, aluminum, aluminized steel, stainless steel.
 Standard hub bore sizes: 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", others per request.
 One set screw - standard. More screws, key-way, pulling groove - special order.
 Rotation is determined by viewing the hub from the open side.
 Dimensions shown are standard - special sizes may be available upon request.

D Diameter												W Width		A - A1 Width	
N9.45" 240mm	N8.45" 215mm	N7.87" 200mm	N7.28" 185mm	N6.31" 160mm	N5.75" 145mm	N5.25" 133mm	N4.75" 120mm	N4.25" 108mm	N3.81" 96mm	N3.19" 81mm	N3.00" 76mm	Inches	mm	Inches	mm
				Z 48	Z 44	Z 40	Z 45	Z 32	Z 29-32-36	Z 24	Z 22	2.06	52.0	1.03	26.0
							Z 27-36	Z 35-40	Z 32	Z 30	Z 22	3.00	76.0	1.50	38.0
						Z 30		Z 24	Z 26-28-30	Z 26	Z 22-23	3.75	95.0	1.87	47.5
	Z 49		Z 42	Z 36	Z 33-37	Z 30	27-31	Z 24	Z 30			4.00	103.0	2.00	51.5
	Z 49		Z 43	Z 36	Z 33	Z 30	Z 27	Z 24	Z 21-23-30			5.00	123.0	2.50	61.5
Z 55			Z 42-43	Z 36	Z 33	Z 30	Z 27	Z 24	Z 22-25			5.86	147.0	2.93	73.5
	Z 49		Z 42-49	Z 36	Z 33	Z 30	Z 27	Z 24				6.50	164.0	3.25	82.0
Z 55	Z 49	Z 45	Z 42-43	Z 36	Z 33	Z 30	Z 27	Z 24				6.86	176.0	3.43	88.0
Z 55	Z 49	Z 46	Z 43	Z 36	Z 33	Z 30	Z 27	Z 24				7.62	192.0	3.81	96.0
	Z 43	Z 41		Z 36	Z 29	Z 30						8.00	204.0	4.00	102.0
Z 55	Z 49	Z 45	Z 42	Z 36	Z 33	Z 30		Z 24				8.66	220.0	4.33	110.0
Z 52		Z 43	Z 40-42	Z 36								9.24	234.0	4.62	117.0
Z 49	Z 43	Z 41	Z 42	Z 36				Z 24				9.45	240.0	4.72	120.0
8.74" 221mm	7.71" 196mm	7.09" 180mm	6.51" 165.5mm	5.63" 143mm	5.2" 132mm	4.72" 120mm	4.25" 108mm	3.75" 95mm	3.25" 82.4mm	2.67" 67.8mm	2.5" 63.5mm	Inside Ring d			

Z = number of blades

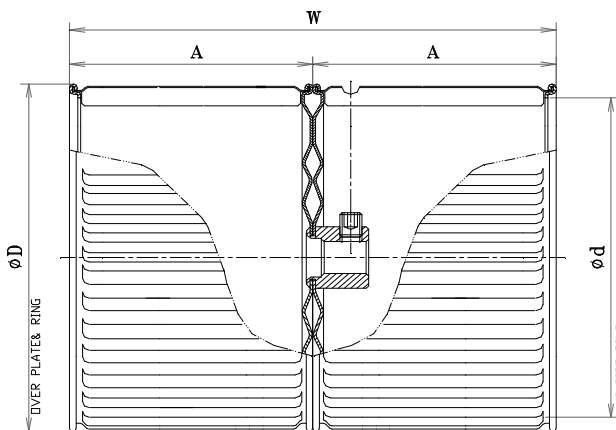

TYPE : N
Double Inlet

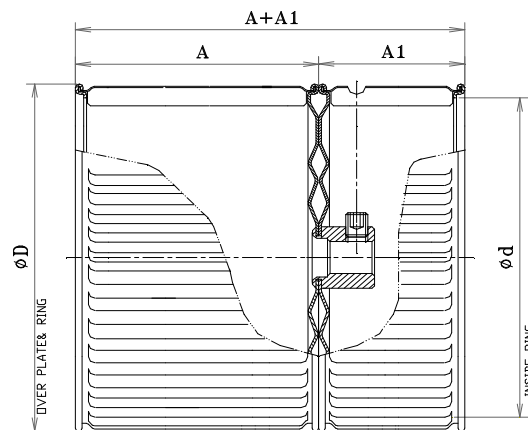

TYPE : N
Double Inlet

